








Submersible motors Size 2 for hydraulic lifts suitable to be fit Settima Meccanica special screw pumps with flow rate 1000 and 1200 liter with

Shaft / hole Ø38 mm Flange Ø220 mm

MOTORI TRIFASI *THREE PHASE MOTORS* DREIPHASEENMOTOREN *MOTEURS TRIPHASES*

60 Hz
S794K-T-SE-
1701-20

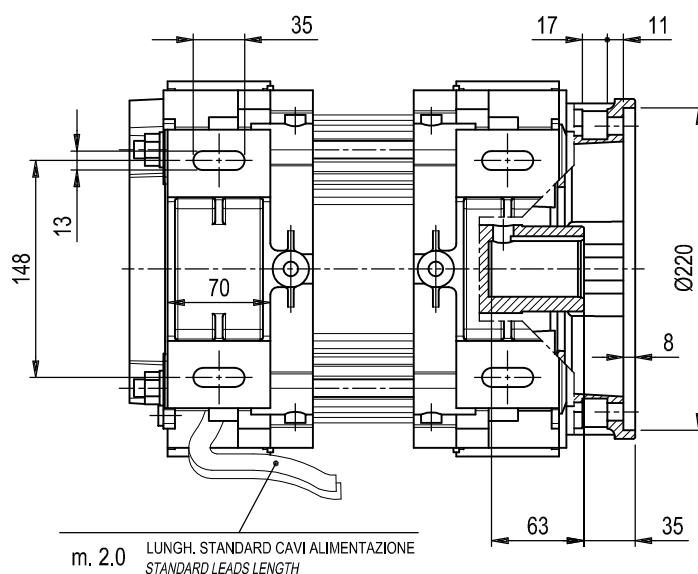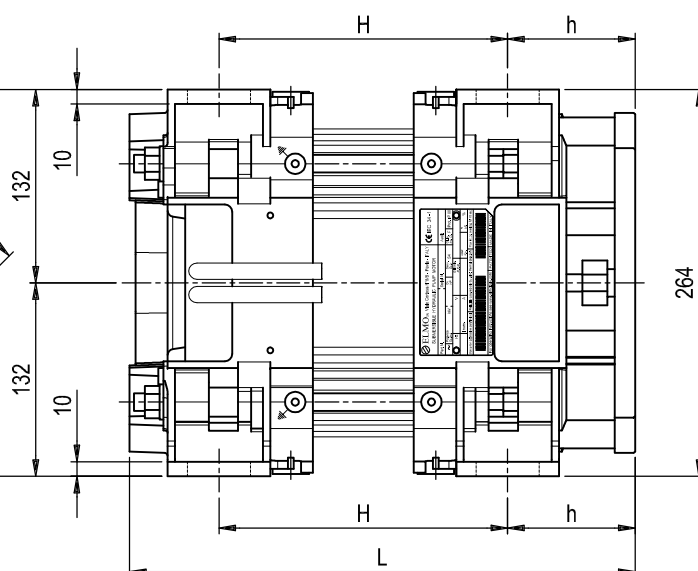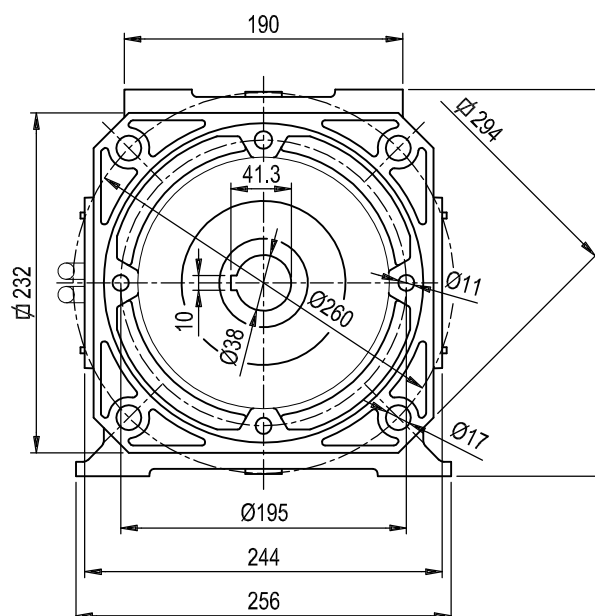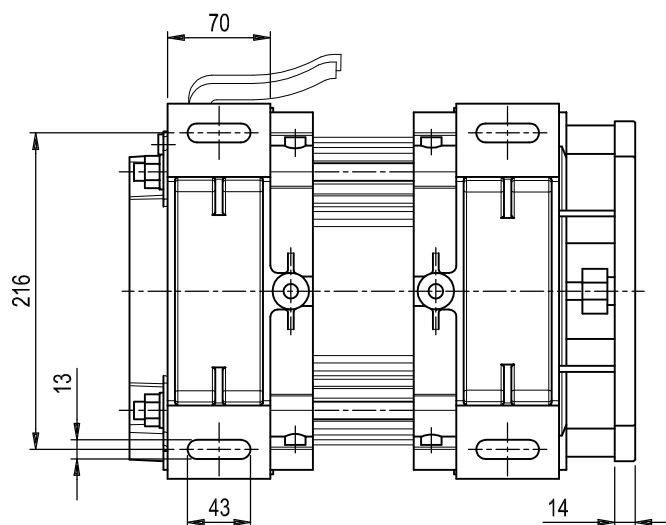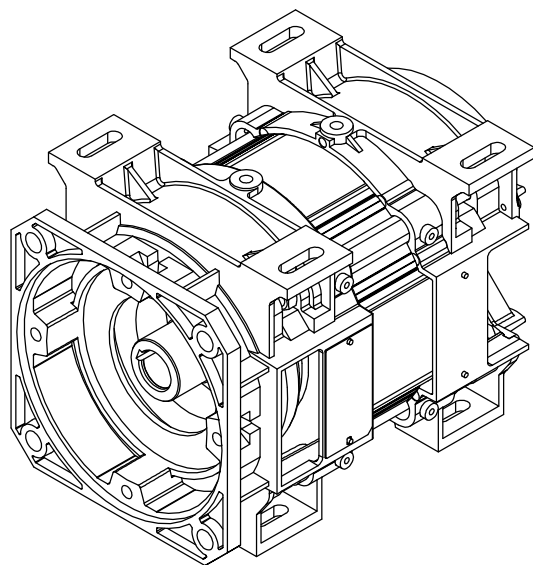

m. 2.0 LUNGH. STANDARD CAVI ALIMENTAZIONE
STANDARD LEADS LENGTH

SERIE - INTERVAL SERIES			POTENZA A 60 Hz NOMINAL OUTPUT AT 60 Hz		TRIFASE - THREE PHASE	TENSIONE VOLTAGE		60 Hz - CYCLES AT 60 Hz		ATTACCHI - FEET		TERMINALI - LEAD TERMINAL		DIMENSIONI DIMENSION		POTENZA A 60 Hz NOMINAL OUTPUT AT 60 Hz	
K	kW			T		V		S	F		L	h	H	HP			
	1 5	-								360	87	212	2 0				
	1 8	-							375	227		2 5					
	2 2	-							395	247		3 0					
	2 6	-							420	272		3 5					
	3 7	-							460	312		5 0					
	4 5	-							510	362		6 0					
	5 4	-							565	417		7 3					
	6 6	-							615	467		9 0					

TIPO - TYPE		GRANDEZZA - ACCORPIAM. SIZE - SUITABLE TO		POLARITA' - POLES		SERIE - INTERNAL SERIES		POTENZA A 60 Hz NOMINAL OUTPUT AT 60 Hz		TRIFASE - THREE PHASE		TENSIONE VOLTAGE		60 Hz - CYCLES AT 60 Hz ATTACCHI - FEET TERMINALI - LEAD TERMINAL		DIMENSIONI DIMENSION		POTENZA A 60 Hz NOMINAL OUTPUT AT 60 Hz	
S	7	9	4	K	1	5	-	T	KW		V	S	E	L	h	H	HP		
					1	8	-							360	87	212	2 0 -		
					2	2	-							375		227	2 5 -		
					2	6	-							395		247	3 0 -		
					2	6	-							420		272	3 5 -		
					3	7	-							460		312	5 0 -		
					4	5	-							510		362	6 0 -		
					5	4	-							565		417	7 3 -		
					6	6	-							615		467	9 0 -		