

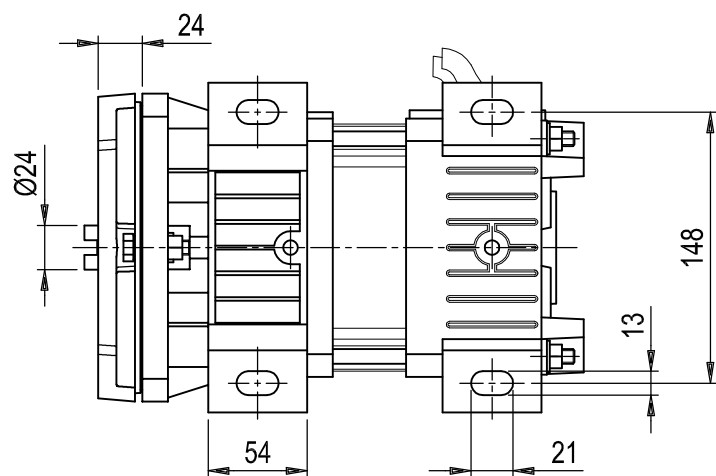

ELMO

V.le Certosa 8/B - 27100 Pavia Italy
Tel. + 39 382 529564 - 422372
Fax. + 39 382 527041
E-Mail: info@elmoitaly.com

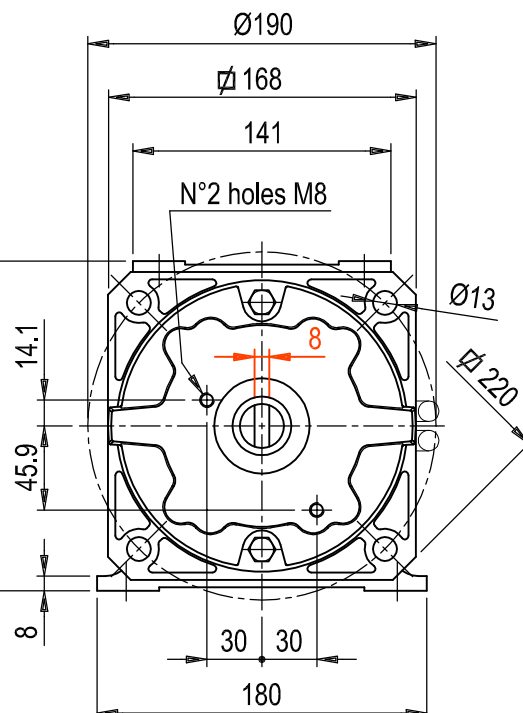
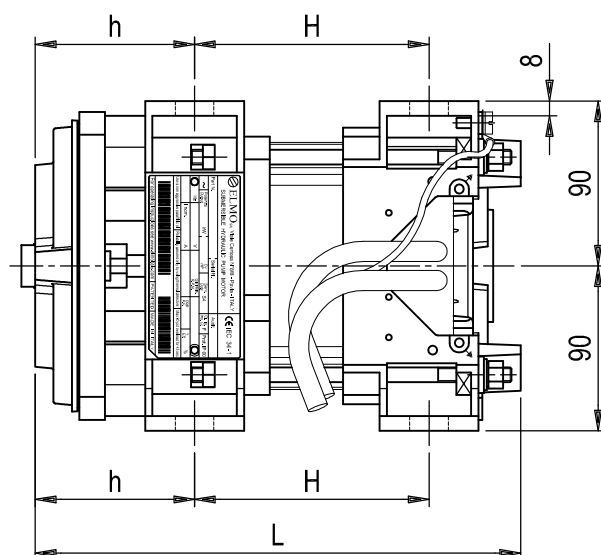
SUBMERSIBLE MOTORS
MOTORS 4 POLES

Female groove 8 mm Flange Ø52 mm

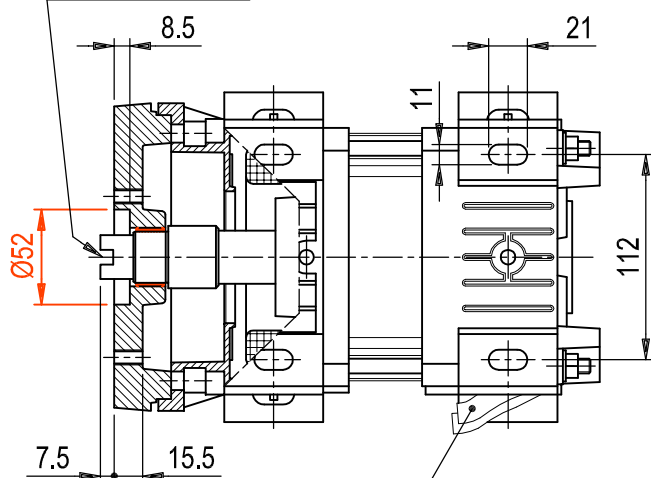
MOTORI MONOFASI SINGLE PHASE MOTORS EINPHASEENMOTOREN MOTEURS MONOPHASES

 50 Hz
S3 M4 - M - NE - U
1904-11

 Suitable for Pump
Type F2 BK7 - AG

Gruppo 2

 N.B. Motori a servizio S2 30 min
Duty motor S2 30 min


Depth groove = 7


 m.1.40 LUNGH. STANDARD CAVI ALIMENTAZIONE
STANDARD LEADS LENGTH

MOTORS WITHOUT FLYWHEEL

TIPO - TYPE	GRANDEZZA - ACCOPIAM. SIZE - SUITABLE TO	POLARITA' - POLES	SERIE - INTERNAL SERIES	kW	POTENZA A 50 Hz NOMINAL OUTPUT AT 50 Hz	MONOFASE - SINGLE PHASE	TENSIONE VOLTAGE	50 Hz - CYCLES AT 50 Hz	ATTACCHI - FEET	TERMINALI - LEAD TERMINAL	TIPO FLANGIA - FLANGE TYPE	DIMENSIONI DIMENSION		POTENZA A 50 Hz NOMINAL OUTPUT AT 50 Hz
							V					L	h	HP
S	3	M 4	-	-	7	M			N	E	- U	279	87	143 - 1 -
			-	-	12							294		158 - 1 6
			-	-	15							309		173 - 2 -
			-	-	18							309		173 - 2 5
			-	-	22							324		188 - 3 -
			-	-	26							339		203 - 3 5
			-	-	29							354		218 - 4 -
			-	-	37							374		238 - 5 -